



182 GRANITE STREET, SUITE 101, CORONA, CA 92879

PHONE: (951)278-1830 FAX: (951)278-8444 www.canfab.com canfab@canfab.com

TEMPSTAR 6 - 12 1/2 TON

72-120, RAS 90-150, RGH 72-120, RGS 90-150,
RHH 72-102, RHS 90-120

RAH

PART NO: SEE BELOW

VIBRATION ISOLATION ADAPTOR FOR USE WITH STANDARD CURB REPLACES I485-IC*

SELECT PRODUCT



MODEL

PART #

APPROX. SHIPPING WEIGHT

STANDARD ISOLATION ADAPTOR

1008-AIC

215 LBS.



POWER EXHAUST ISOLATION ADAPTOR

1008-AXIC



220 LBS.

FEATURES

- USE 1008-AXIC FOR UNITS WITH CENTRIFUGAL BLOWER POWER EXHAUST. ALL OTHERS USE 1008-AIC.
- SHIPPED FULLY ASSEMBLED.
- FULL PERIMETER ADAPTOR, WOOD NAILER, RAIL, FLASHING, WATER AND AIR BARRIER.
- SPRING ISOLATION WITH 2" STATIC DEFLECTION AND EARTHQUAKE RESTRAINTS (OSHPD APPROVED).
- WEATHER TIGHT ACCESS DOORS AT EACH ISOLATOR LOCATION FOR ADJUSTMENT.
- OPTIONAL FLEX CONNECTORS ADD "F" TO THE END OF PART NUMBER.
- ADDITIONAL ISOLATOR FOR POWER EXHAUST APPLICATION INCLUDED ON 1008-XIC ONLY.
- TOTAL HEIGHT 10.5", INCLUDES ADAPTOR, ISOLATOR & RAIL.

INSTALLATION

- 1 - ATTACH ANGLES AROUND PERIMETER FLUSH WITH TOP OF CURB. SECURE WITH #10X.75 TEK SCREWS, PROVIDED, ON APPROXIMATELY 12" CENTERS.
- 2 - INSTALL GASKET PROVIDED WITH THE EXISTING CURB.
- 3 - PLACE ADAPTOR ON TOP OF EXISTING CURB.
- 4 - SECURE WITH #10X.75 TEK SCREWS, PROVIDED, ON APPROXIMATELY 12" CENTERS AVOIDING ISOLATOR POSITIONS, UP FROM BOTTOM THROUGH NEW ANGLES INTO ADAPTOR.
- 5 - INSTALL GASKET PROVIDED ON TOP OF ADAPTOR.
- 6 - SET UNIT AND ANCHOR PER JOB REQUIREMENTS.

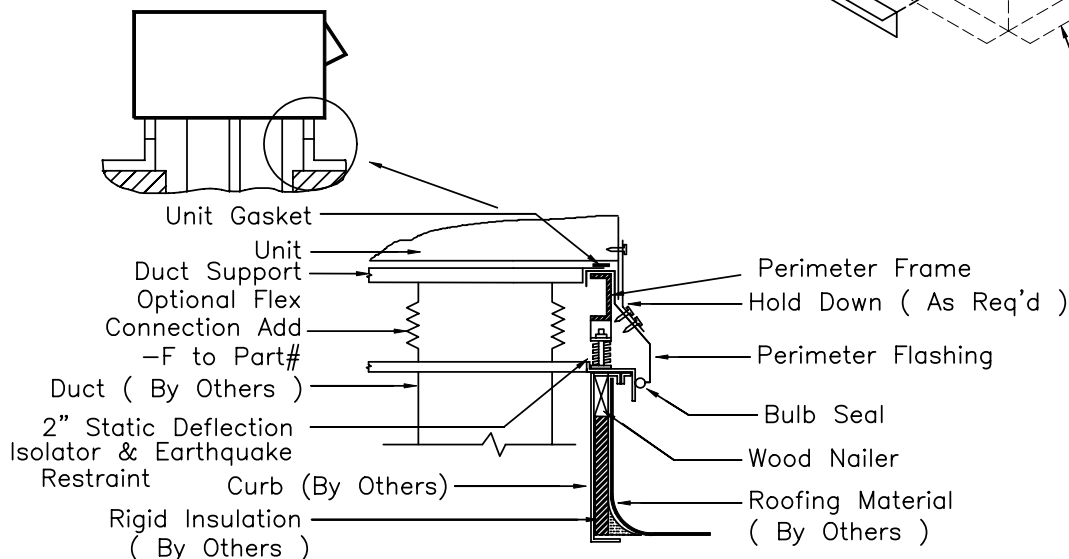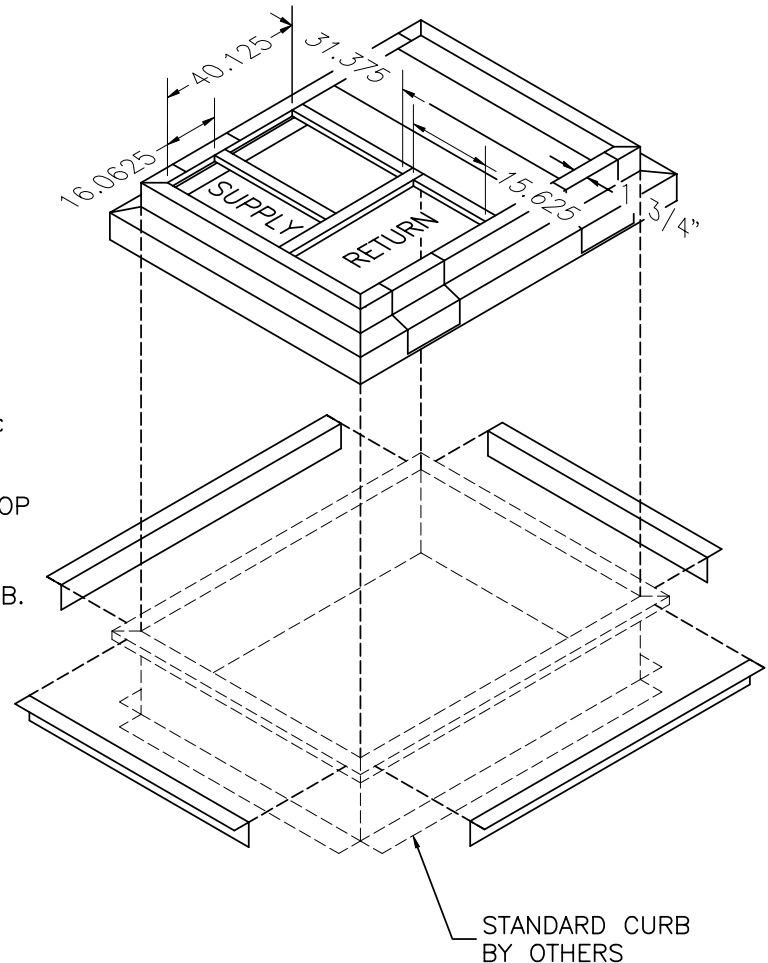

PROJECT:

DATE:

ENGINEER:

DISTRIBUTOR:

DRAWING NUMBER: